


# 1540CW

## ASJ FACING TAPE

VentureTape® 1540CW is a white kraft/scrim/foil laminate (ASJ) coated with a cold weather acrylic pressure sensitive adhesive. Specifically designed for use as a vapor seal on ASJ faced duct board and pipe insulation, VentureTape 1540CW applies easily and excels in demanding temperature and humidity applications, providing superior performance and durability over a wide range of conditions.

### Product Construction

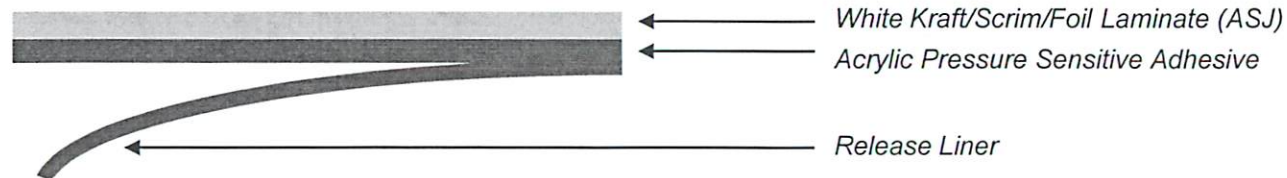

### Features & Benefits

- UL723 Classified (0/5 Flame/Smoke Rating)  
UL file # R10984
- Facing used meets ASTM C1136, Type I, II, III, IV
- Specifically designed for cold weather; also excels in high heat and humidity conditions
- Tri-directionally reinforced 4 x 4 squares per inch fiberglass scrim, UL listed laminate
- High performance insulation tape is ideal for use as a vapor seal for on ASJ faced fiberglass duct board and pipe insulation
- In stock product available for immediate delivery

### Product Configurations

- Standard roll widths: 2", 3", 4", 5"
- Standard length: 50Y

Test	Typical Value	Typical Value (Metric)	Test Method
Product Thickness <sup>□</sup>	10.8 mils	0.27 mm	PSTC-133
Peel Adhesion <sup>△</sup>	45 oz/in	12.5 N/25 mm	PSTC-101
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @ 15.2 kPa	PSTC-107
Tensile Strength	55 lb/in	248.6 N/25 mm	PSTC-131
Elongation	6 %	6 %	PSTC-131
WVTR	0.02 perms		ASTM E96
Emissivity	0.9		ASTM E408
Service Temperature	-40 to 240 °F	-40 to 116 °C	

<sup>□</sup> - excluding liner

<sup>△</sup> - 20 minute dwell

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Venture Tape recommends that the purchaser test for fitness of use in all applications.

Contact Venture Tape today for a complete