


Foilastic® Roof Flashing Tape

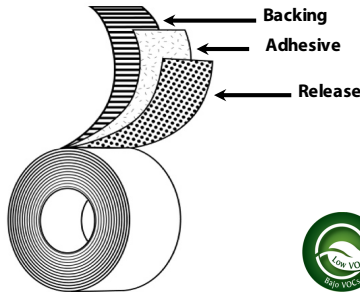

- Backing:** 2 mil Aluminum Foil
- Adhesive:** Butyl Rubber
- Liner:** LDPE Film
- Colors:** Aluminum
- Specifications:** AAMA-711, ASTM E2112
15 Year Limited Warranty
- Standard Sizes:** 48mm x 15M, 3" x 50Ft, 4" x 50Ft, 6" x 50Ft, 9" x 50Ft, 36" x 50Ft

Applications

- Flashing hip, ridge, and penetration details on concrete tile roofs
- Sealing gutters, roof valleys and eaves, chimneys and vents, and rooftop duct systems
- Deck-to-wall joints
- Sheet metal repairs on mobile homes, trailers
- Sealing other detail areas against water and air penetration

Features

- 2 mil Aluminum Foil Backing
- Premium Butyl Rubber Adhesive
- LDPE Liner

Benefits

- Conformable and durable
- Excellent air and moisture barrier properties
- Suitable for indefinite outdoor UV exposure
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Excellent all-temperature performance
- Compatible with sealants and caulking
- Self-healing after puncture
- Used properly, can contribute toward requirements for EA Credit 1 (Optimize Energy Performance) under LEED®
- Easy to use
- Moisture resistant

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	35.0 mils	0.889 mm	ASTM D-1000
Adhesion to Steel	264 oz/in	28.88 N/cm	PSTC 101
Adhesion to Plywood	251 oz/in	27.46 N/cm	ASTM D903-93
Adhesion to OSB	232 oz/in	25.38 N/cm	ASTM D903-93
Adhesion to PVC	241 oz/in	26.37 N/cm	ASTM D903-93
Adhesion to Housewrap	243 oz/in	26.58 N/cm	ASTM D903-93
Tensile Strength	20 lb/in	35.03 N/cm	ASTM D412-97
Installation Temperature	30 to 180 °F	-1 to 82 °C	
Operating Temperature	-30 to 200 °F	-34 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.