


MERCO TAPE – TECHNICAL DATA SHEET

Merco M306 series Economy Grade Duct Tape

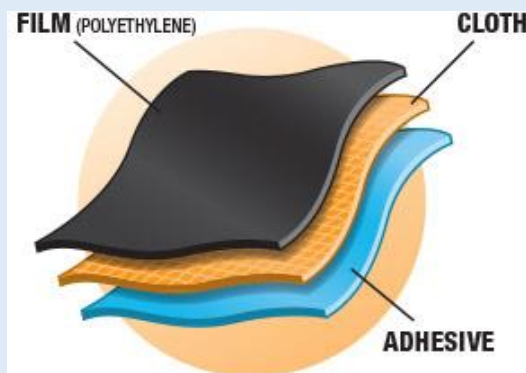

Merco M306 Economy Grade Duct Tape For general repair, bundling, light patching, retail sales and taping diapers when their older sibling decided to play a joke on the babysitter. Conformable and hand tearable and binds well to most surfaces.

Ok, let's be honest with one another: This isn't the tape you would use to install a state of the art HVAC system in your 12k sf Malibu beach house but for a low-end general-purpose duct it is good stuff. The raw stock we use is made in America by a major US manufacturer.

Technical Data

	Imperial UOM	Metric UOM	Test Method
Total Thickness	6.0 mil	.152 mm	ASTM D-1000
Adhesion to Steel	40 oz/in	4.38 N/cm	PSTC-101
Tensile Strength	17 lb/in	29.77 N/cm	PSTC-101
Elongation	5 %	5 %	ASTM D-1000
Operating Temperature	40F – 180F	4C to 82 C	ASTM D-1000
VOC Content		Less than 1 g/L	

Merco Tape

Info@MercoTape.com

(845) 357-3699

Buy@MercoTape.com

www.MercoTape.com

www.ElectricalTape.com

www.MaskingTape.com

MERCO TAPE – TECHNICAL DATA SHEET

Recommended Storage Conditions: 32F-90F at 50% Relative Humidity
Standard Shelf Life at 77F – 25C: 36 months from Date of Manufacture

Merco Tape

Info@MercoTape.com (845) 357-3699 Buy@MercoTape.com

www.MercoTape.com www.ElectricalTape.com www.MaskingTape.com

Revised Nov 1 2020